




ASI Storage Solutions

# TRADITIONAL COLLECTION

## 16 Person Locker

Date Issued: 06-12

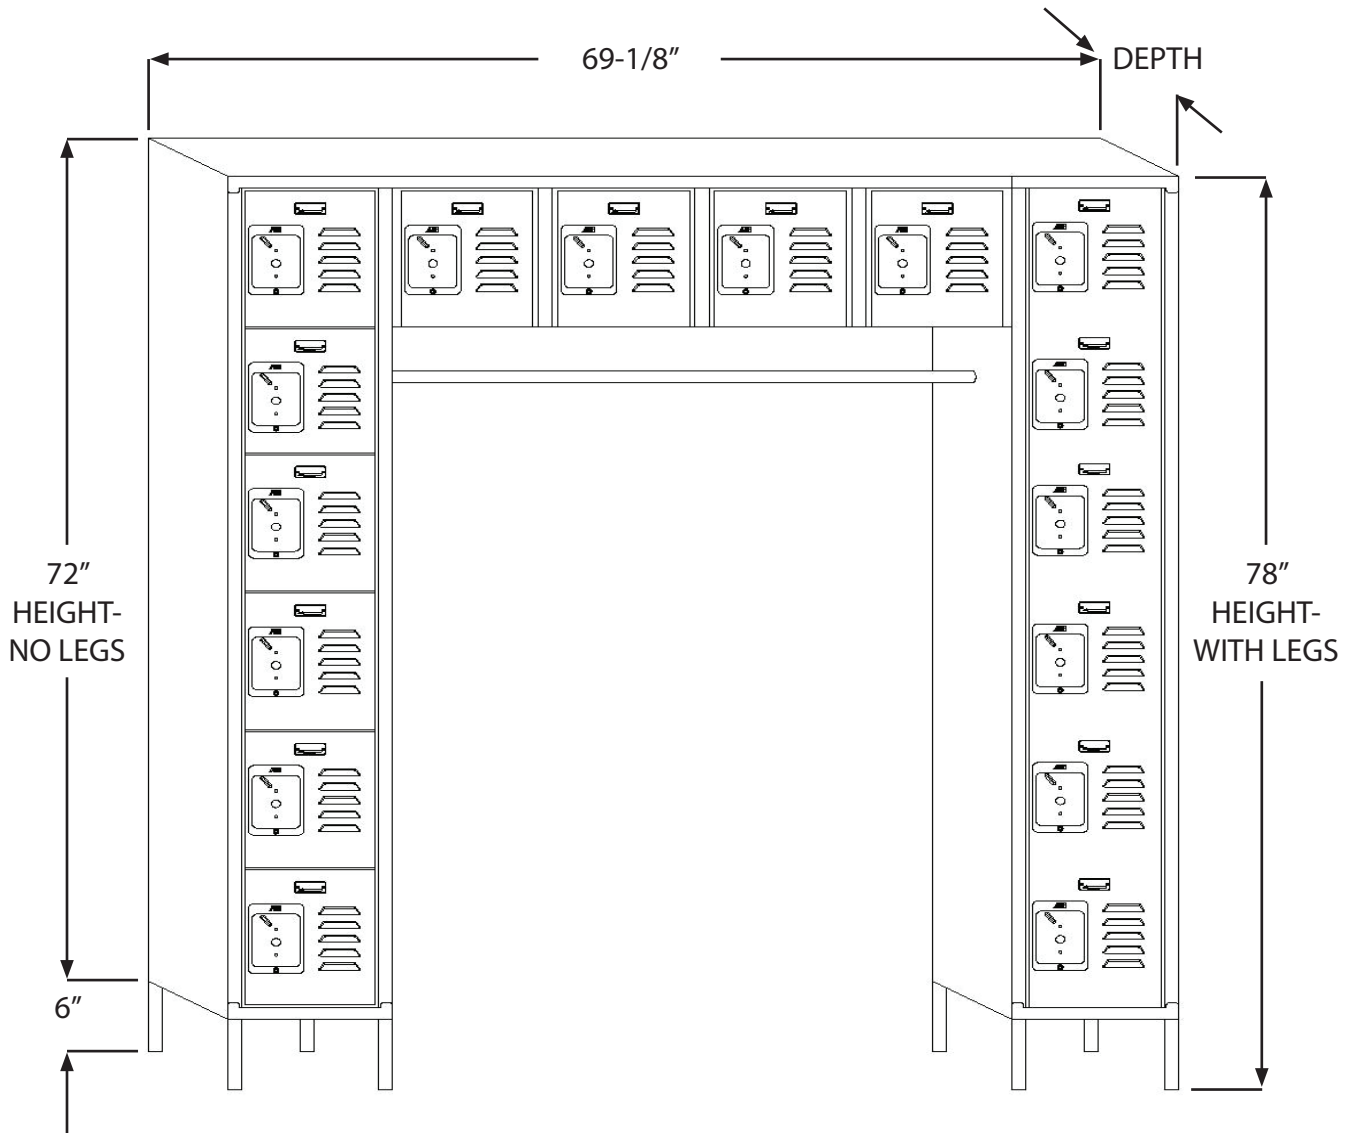

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

ASI Storage Solutions  
2171 Liberty Hill Road, Eastanollee, GA 30538  
Phone: 706.827.2720 Fax: 706.827.2710  
E-Mail: info@asistorage.com Web: asistorage.com

Page 1 of 2



ASI Storage Solutions

## TRADITIONAL COLLECTION

# 16 Person Locker

Date Issued: 06-12

### SPECIFICATION

**Material** – All major steel parts shall be of mild cold rolled commercial quality steel.

**Finish** – All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

**Construction** – All lockers shall be built on a unit principle with common intermediate uprights separating units.

**Door Frames** – Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped.

**Doors** – Shall be 16 gauge with louvers for ventilation. Doors are channel shaped on both the lock and hinge side with angle formations across the top and bottom.

**Body** – Bottoms shall be 16 gauge. Tops, sides, backs and shelves shall be 24 gauge. Bolt spacing shall not exceed 9" o.c.

**Hinges** – Shall be full length 16 gauge continuous piano type riveted to both door and frame.

**Handles** – Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

**Latching** – Lockers shall have a 11 gauge frame hook with anti-pry feature secured to the frame. The frame hook shall have a padlock hasp protruding through the recessed handle. A rubber silencer shall be firmly secured to the frame at each latch hook.

**Equipment** – 45" coat rod mounted between vertical locker sections.

**Number Plates** – Each locker shall have a polished aluminum number plate riveted to door frame with black numerals 3/8" high.

**Color** – Doors and exposed body parts shall be selected from ASI Storage Solution's standard designer color range. Non-exposed body parts shall be finished in #03 Almond or #25 Gray with #25 Gray exterior.

**Assembly** – All locker components shall be assembled with rivets.

**Installation** – Lockers shall be installed in accordance with ASI Storage Solution's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.