


SINGLE TIER LOCKER

Date Issued 01-17

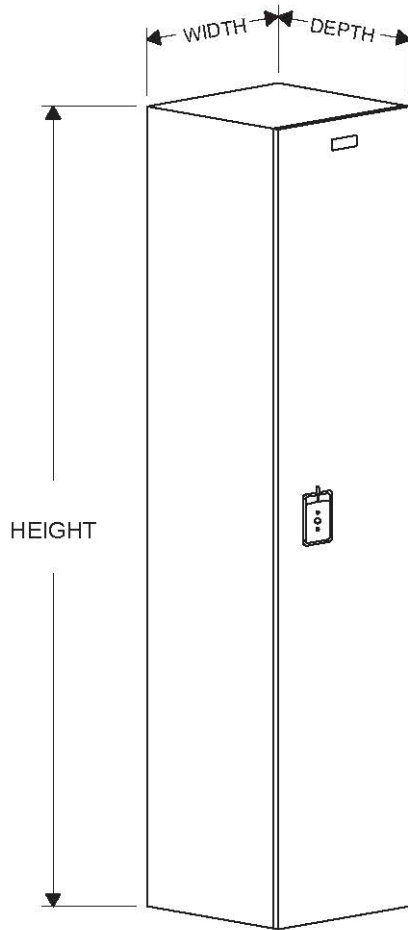

| WIDTH | DEPTH | HEIGHT | |
|-------|-------|--------|----|
| | | 60 | 72 |
| 12 | 12 | | |
| 12 | 15 | | |
| 12 | 18 | | |
| 15 | 15 | | |
| 15 | 18 | | |
| 18 | 18 | | |

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

SPECIFICATION

Material – Shall be constructed of solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Doors – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Side and Back Panels – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Tops, Bottoms, and Shelves – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

End Cover Panels – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Slope Top Kits, Filler Kits, and Trim Kits – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Hinges – Shall be continuous full length, black and shall be securely fastened, 120 degree limited range.

Latching – Shall be mounted at the mid-point of each door. Hasps shall be mounted below each handle and will accept standard padlock types.

Interior Equipment – Hooks shall be zinc plated forged steel, ball ends.

Number Plates – A quantity of one per opening will be supplied in polished aluminum with black numerals 1/2” high.

Color – All lockers components to be of the same color of decorative plastic laminate.

Assembly – Shall be assembled by means of machined joints, pins, and tamper resistant mechanical fasteners to discourage non-factory disassembly. Locker components to be square, rigid, and free of scratches.

Installation – Lockers shall be installed in accordance with ASI Storage Solution’s installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.