


SIX TIER LOCKER

Date Issued 01-17

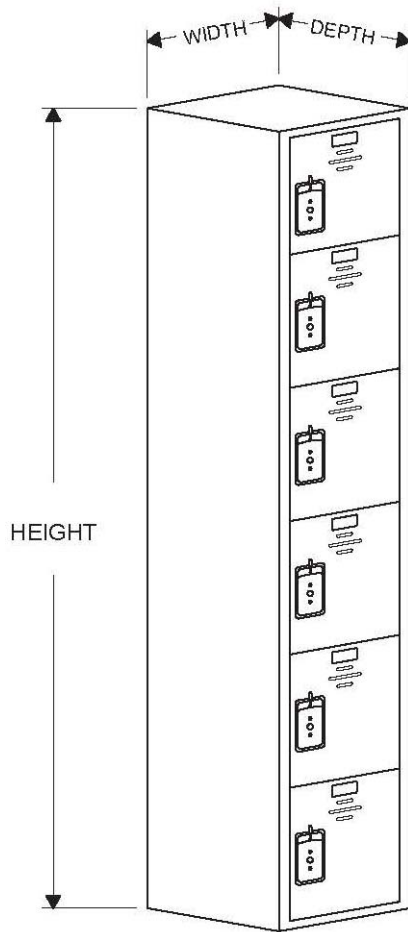

WIDTH	DEPTH	HEIGHT	
		60	72
12	12		
12	15		
12	18		
15	15		
15	18		
18	18		

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

SPECIFICATION

Material – Lockers shall be made from high impact high-density polyethylene (HDPE).

Finish – Shall be commercial grade texture on all flat surfaces.

Construction – All lockers shall be built on a unit principle with common intermediate uprights separating units.

Door Frames – Shall be made of 1/2” thick HDPE material that is water resistant and non-absorbing.

Doors – Shall be made of 1/2” thick HDPE material that is water resistant and non-absorbing.

Body – Shall be made of 1/2” thick HDPE material that is water resistant and non-absorbing.

Hinges – Shall be continuous full length, black and shall be securely fastened

Handles – Shall be solidly mounted to internal latch mechanism.

Latching – Shall be securely attached to the door, continuous in design and be capable of accepting various locking mechanisms.

Interior Equipment – Hooks shall be zinc plated forged steel, ball ends.

Number Plates – A quantity of one per opening will be supplied in polished aluminum with black numerals 1/2” high.

Bases – Shall be fabricated from HDPE Polymer to form components with 1” nominal thickness.

Color – Interior and Exterior of locker shall be homogeneous in color. Color to be chosen from one of the nine colors from the standard offering.

Assembly – Shall be assembled by means of machined joints, pins, and tamper resistant mechanical fasteners to discourage non-factory disassembly. Locker components to be square, rigid, and free of scratches.

Installation – Lockers shall be installed in accordance with ASI Storage Solution’s installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.