




ASI Storage Solutions

TRADITIONAL COLLECTION

Five Tier Locker

Date Issued: 06-12

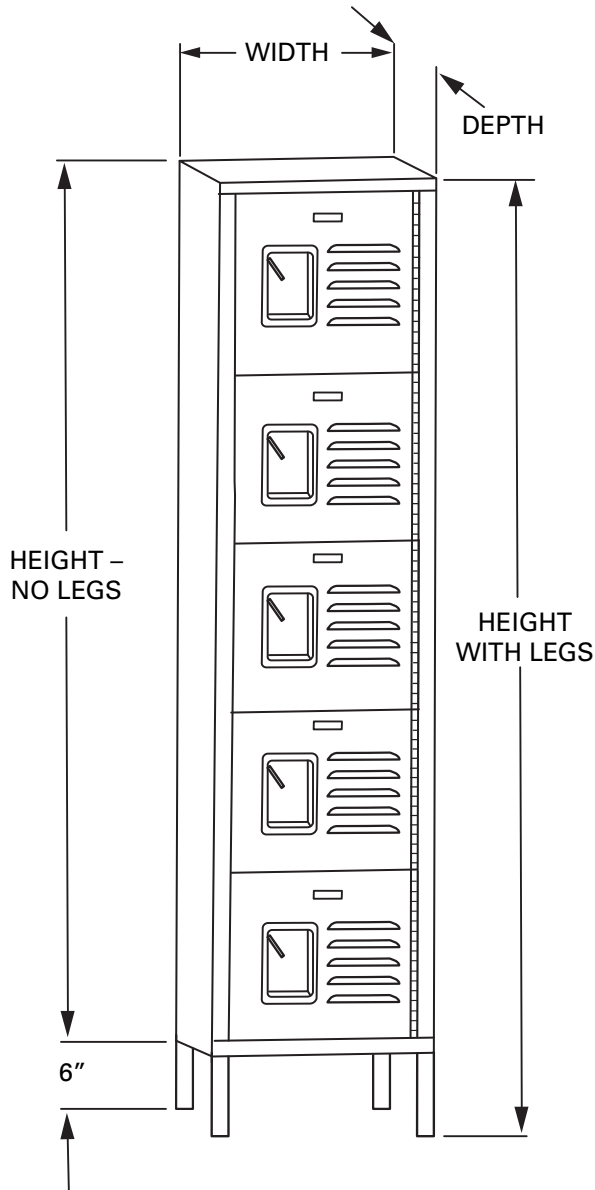

| | | HEIGHT WITH LEGS |
|----|----|------------------|
| | | 66 |
| 12 | 12 | |
| 12 | 15 | |
| 12 | 18 | |
| 15 | 15 | |
| 15 | 18 | |
| | | HEIGHT - NO LEGS |
| | | 60 |
| 12 | 12 | |
| 12 | 15 | |
| 12 | 18 | |
| 15 | 15 | |
| 15 | 18 | |

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

ASI Storage Solutions
 2171 Liberty Hill Road, Eastanollee, GA 30538
 Phone: 706.827.2720 Fax: 706.827.2710
 E-Mail: info@asistorage.com Web: asistorage.com





ASI Storage Solutions

TRADITIONAL COLLECTION

Five Tier Locker

Date Issued: 06-12

SPECIFICATION

Material – All major steel parts shall be of mild cold rolled commercial quality steel.

Finish – All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

Construction – All lockers shall be built on a unit principle with common intermediate uprights separating units.

Door Frames – Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped.

Doors – Shall be 16 gauge with louvers for ventilation. Doors are channel shaped on both the lock and hinge side with angle formations across the top and bottom.

Body – Bottoms shall be 16 gauge. Tops, sides, backs and shelves shall be 24 gauge. Bolt spacing shall not exceed 9" o.c.

Hinges – Shall be full length 16 gauge continuous piano type riveted to both door and frame.

Handles – Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

Latching – Lockers shall have a 11 gauge frame hook with anti-pry feature secured to the frame. The frame hook shall have a padlock hasp protruding through the recessed handle. A rubber silencer shall be firmly secured to the frame.

Number Plates – Each locker shall have a polished aluminum number plate riveted to door frame with black numerals 3/8" high.

Color – Doors and exposed body parts shall be selected from ASI Storage Solution's standard designer color range. Non-exposed body parts shall be finished in #03 Almond or #25 Gray with #25 Gray exterior.

Assembly – Factory assembled lockers shall be riveted. Knocked Down "KD" lockers shall be supplied with nuts and bolts unless otherwise specified.

Installation – Lockers shall be installed in accordance with ASI Storage Solution's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.