




ASI Storage Solutions

TRADITIONAL COLLECTION

Two Person Locker

Date Issued: 06-12

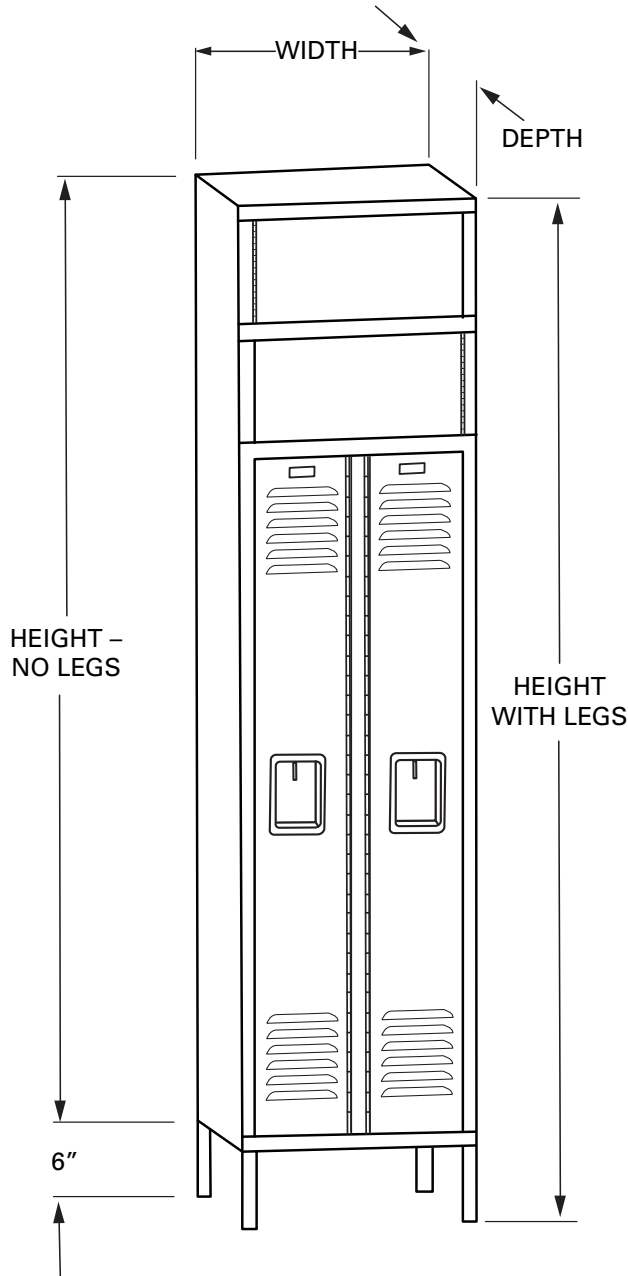

		HEIGHT WITH LEGS
WIDTH	DEPTH	78
15	15	
15	18	
18	18	
		HEIGHT - NO LEGS
WIDTH	DEPTH	72
15	15	
15	18	
18	18	

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

ASI Storage Solutions
 2171 Liberty Hill Road, Eastanollee, GA 30538
 Phone: 706.827.2720 Fax: 706.827.2710
 E-Mail: info@asistorage.com Web: asistorage.com





ASI Storage Solutions

TRADITIONAL COLLECTION

Two Person Locker

Date Issued: 06-12

SPECIFICATION

Material – All major steel parts shall be of mild cold rolled commercial quality steel.

Finish – All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

Construction – All lockers shall be built on a unit principle with common intermediate uprights separating units.

Door Frames – Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped, including intermediate cross frames.

Doors – Shall be 16 gauge with each lower door louvered for ventilation. Doors are channel shaped on both the lock and hinge side with angle formations across the top and bottom.

Body – Bottoms shall be 16 gauge. Tops, sides and backs shall be 24 gauge. Bolt spacing shall not exceed 9" o.c.

Hinges – Shall be full length 16 gauge continuous piano type riveted to both door and frame.

Handles – Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

Latching – *Lower Doors:* The lifting trigger shall be 14 gauge steel, attached to the latching channel. The trigger shall have a padlock eye for use with 9/32" diameter padlock shackle. Doors to have latch clip engaging frame at three points. Locking device to be positive automatic type, whereby locker door may be locked when open, then closed without unlocking. A rubber silencer shall be firmly secured to the frame at each latch hook. *Upper Doors:* Open by unlatching in lower compartment and can be closed independently.

Interior Equipment – Lockers 15" deep shall have two wall hooks per lower compartment. Lockers 18" deep shall have a coat rod and two wall hooks per lower compartment.

Number Plates – Each locker shall have a polished aluminum number plate riveted to door frame with black numerals 3/8" high.

Color – Doors and exposed body parts shall be selected from ASI Storage Solution's standard designer color range. Non-exposed body parts shall be finished in #03 Almond or #25 Gray with #25 Gray exterior.

Assembly – Factory assembled lockers shall be riveted. Knocked Down "KD" lockers shall be supplied with nuts and bolts unless otherwise specified.

Installation – Lockers shall be installed in accordance with ASI Storage Solution's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.