


# FOUR TIER LOCKER

Date Issued 01-17

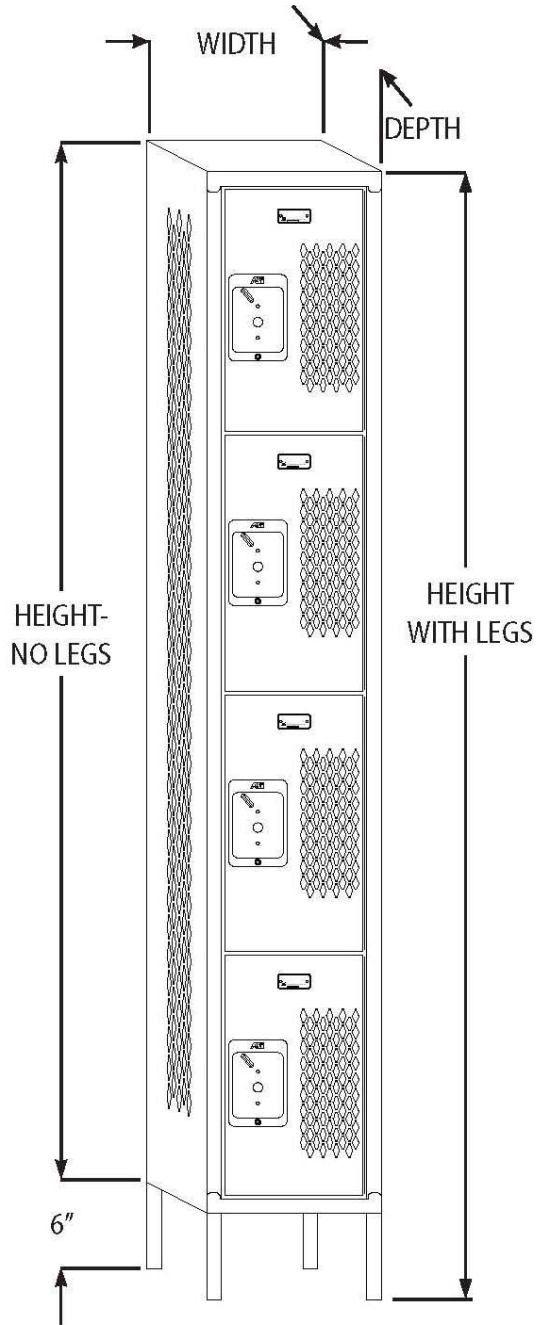

		HEIGHT WITH LEGS	
WIDTH	DEPTH	66	78
12	12		
12	15		
12	18		
15	15		
15	18		
		HEIGHT – NO LEGS	
WIDTH	DEPTH	60	72
12	12		
12	15		
12	18		
15	15		

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

## SPECIFICATION

**Material** – All major steel parts shall be of mild cold rolled commercial quality steel.

**Finish** – All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.

**Construction** – All lockers shall be built on a unit principle with common intermediate uprights separating units.

**Door Frames** – Shall be 16 gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16 gauge channel shaped.

**Doors** – Shall be 14 gauge, channel shaped on both the lock and hinge side, with angle formations across the top and bottom. Locker doors shall have a 16 gauge full height reinforcement channel.

**Body** – Backs shall be 18 gauge; all other body parts shall be 16 gauge. Bolt spacing shall not exceed 9" o.c.

**Hinges** – Shall be full length 16 gauge continuous piano type riveted to both door and frame.

**Handles** – Shall be one-piece 20 gauge deep drawn stainless steel cup designed to accommodate locks.

**Latching** – Lockers shall have an 11 gauge frame hook with anti pry feature secured to the frame. The frame hook shall have a padlock hasp protruding through the recessed handle. A rubber silencer shall be firmly secured to the frame at each latch hook.

**Number Plates** – Each locker shall have a polished aluminum number plate riveted to door frame with black numerals 3/8" high.

**Color** – Doors, frames and all body parts shall be finished in same color.

**Assembly** – Factory assembled lockers shall be riveted. Knocked Down "KD" lockers shall be supplied with nuts and bolts unless otherwise specified.

**Installation** – Lockers shall be installed in accordance with ASI Storage Solution's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.