


DOUBLE TIER LOCKER

Date Issued 01-17

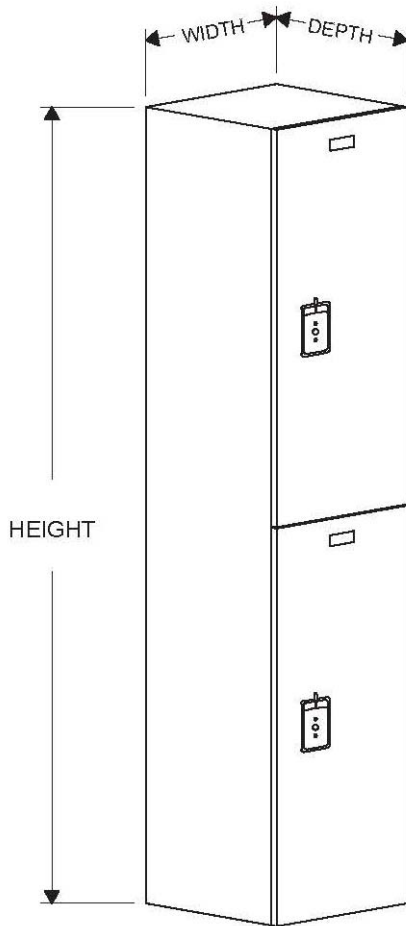

WIDTH	DEPTH	HEIGHT	
		60	72
12	12		
12	15		
12	18		
15	15		
15	18		
18	18		

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE

## SPECIFICATION

Material – Shall be constructed of solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Doors – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Side and Back Panels – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Tops, Bottoms, and Shelves – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

End Cover Panels – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Slope Top Kits, Filler Kits, and Trim Kits – Shall be made of 1/2” solid phenolic core decorative plastic laminate with multiple resin-impregnated kraft and surface sheets fused at high temperature and pressure.

Hinges – Shall be continuous full length, black and shall be securely fastened, 120 degree limited range.

Latching – Shall be mounted at the mid-point of each door. Hasps shall be mounted below each handle and will accept standard padlock types.

Interior Equipment – Hooks shall be zinc plated forged steel, ball ends.

Number Plates – A quantity of one per opening will be supplied in polished aluminum with black numerals 1/2” high.

Color – All lockers components to be of the same color of decorative plastic laminate.

Assembly – Shall be assembled by means of machined joints, pins, and tamper resistant mechanical fasteners to discourage non-factory disassembly. Locker components to be square, rigid, and free of scratches.

Installation – Lockers shall be installed in accordance with ASI Storage Solution’s installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.